
TASK 1 | MAIN ELECTRICAL DISTRIBUTION SCHEMATIC


A3 LANDSCAPE | NOT TO SCALE | 2 x 1500 kVA | 380/220 V LV DESIGN BASIS

NORMAL SUPPLY: 2672.216 kVA total; two independent LV sections.
Equal allocation: 1336.108 kVA / approx. 2030 A per section.

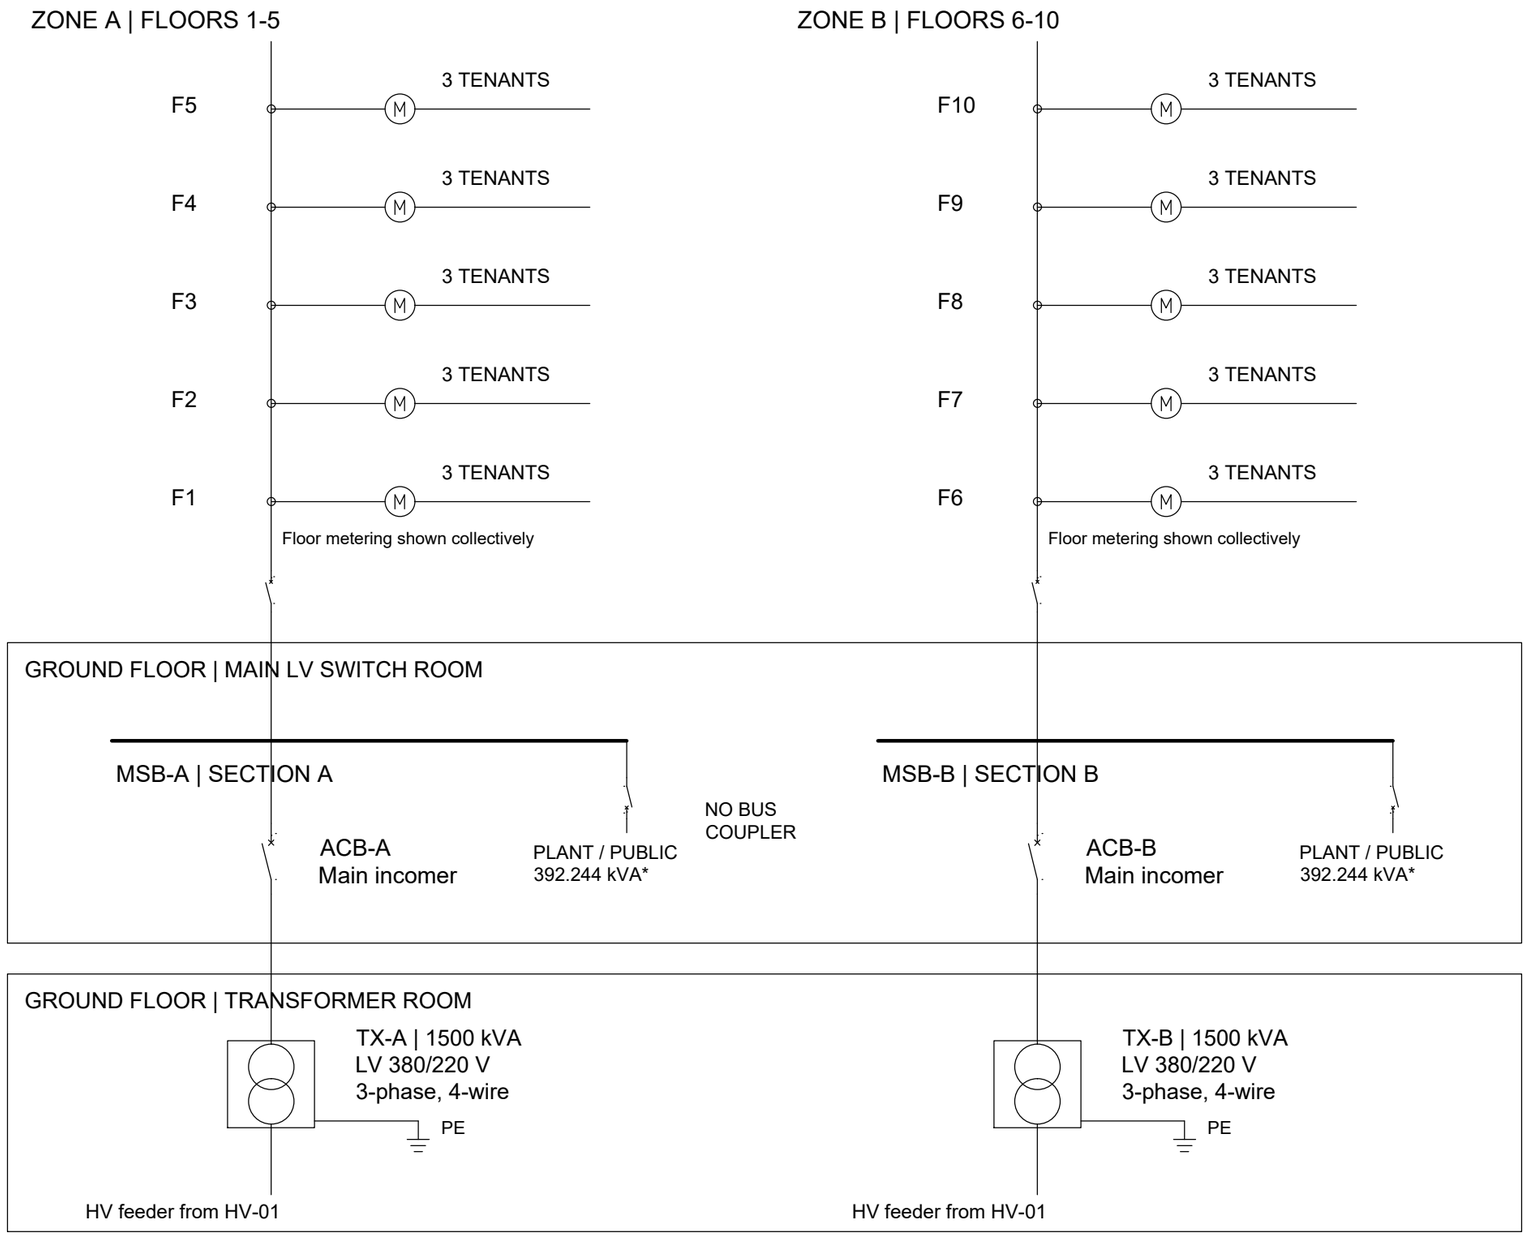

* Per section: AC 292.244 + public services 100 = 392.244 kVA before the 1.1 zoning factor.

TYPICAL OFFICE 1 SUPPLY
Selected tenant detail; applicable to its floor supply zone.

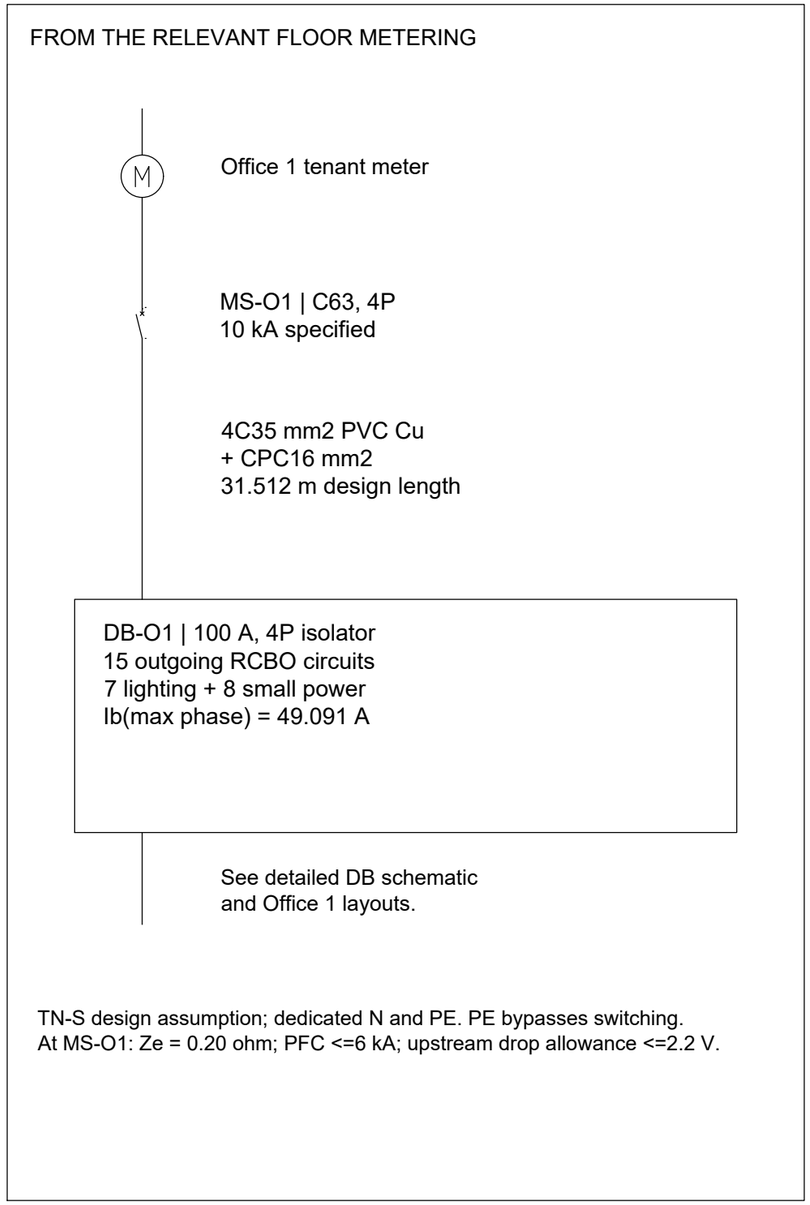

TN-S design assumption; dedicated N and PE. PE bypasses switching.
At MS-O1: Ze = 0.20 ohm; PFC <=6 kA; upstream drop allowance <=2.2 V.

SYSTEM BASIS
HV supply voltage and upstream protection: utility interface. Capacities and LV voltage follow Task 1. Main ACB ratings/settings and fault duties require coordinated equipment selection. PE denotes equipment bonding; source earthing arrangement to be coordinated.

DESIGN LIMITS
No full-load N-1. Central plant/public load is split equally as a design assumption. This sheet shows normal supply; emergency systems are separate.

REFERENCE: Electrical Schematic 1 - transformer, main switchboard and floor-metering arrangement.
Read with the plantroom layout and Office 1 distribution-board schematic.

GROUP 1 | E-04 | REV 01 | 10 NOV 2026