
TASK 1 | GROUND-FLOOR PLANTROOM LOCATION

A3 LANDSCAPE | SCALE 1:200 | DIMENSIONS IN mm | GROUND FLOOR

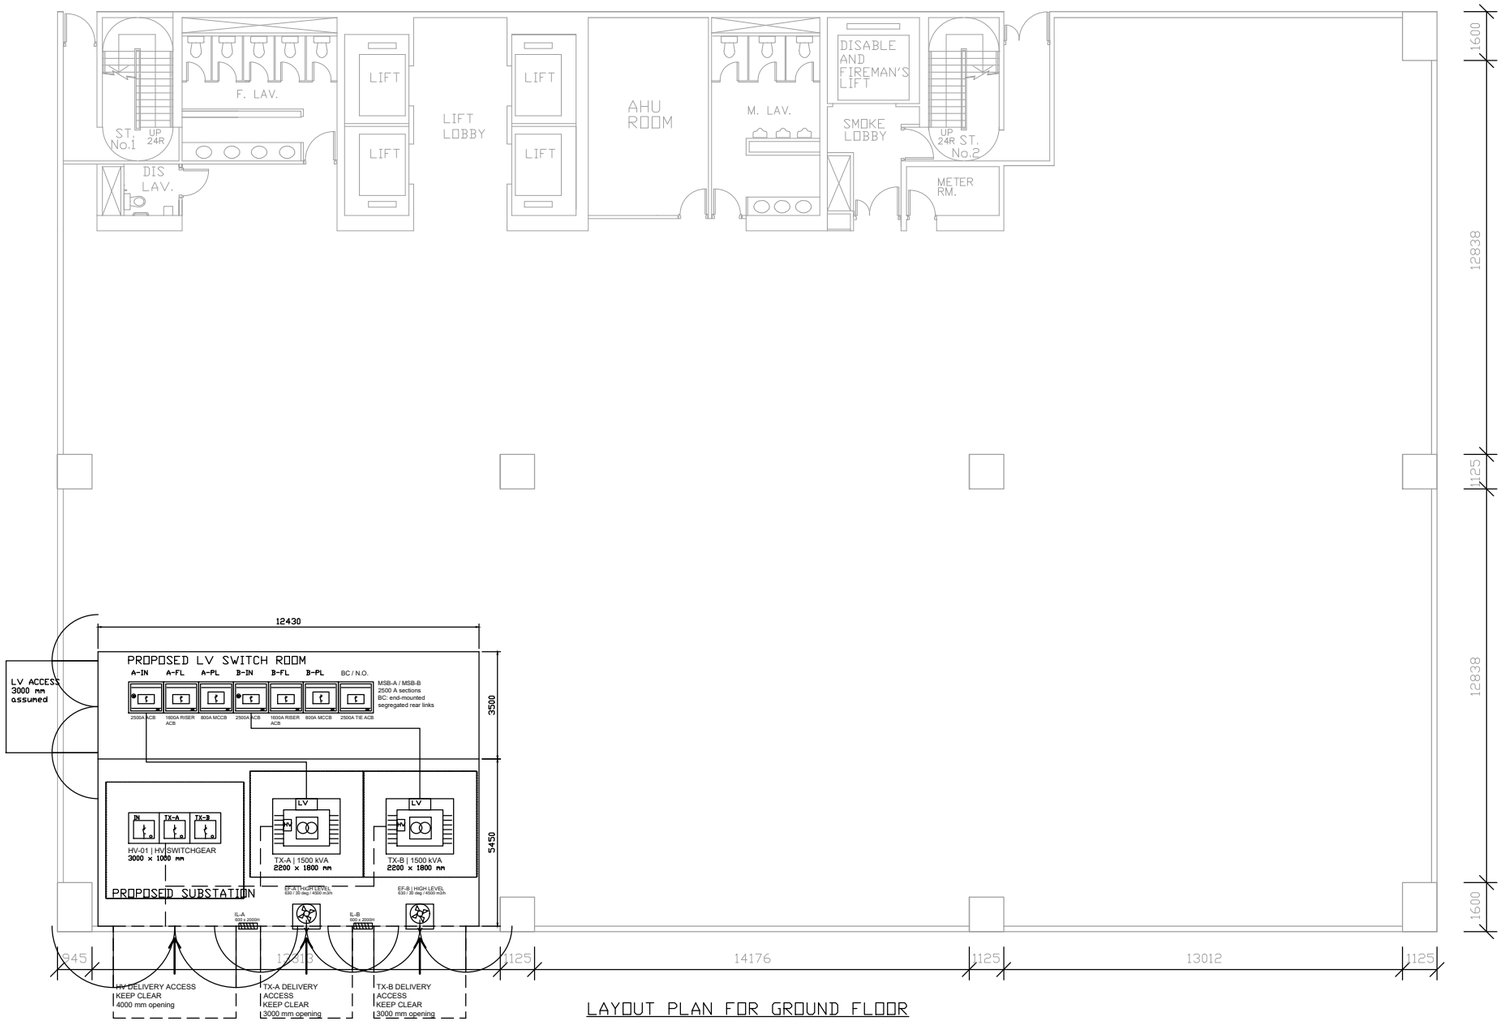

LAYOUT PLAN FOR GROUND FLOOR

PROPOSED LOCATION

Lower-left perimeter of supplied ground-floor plan. Substation 12430 x 5450; adjacent LV room 12430 x 3500 assumed. See separate 1:75 room detail.

LOCATION REASONS

Direct external plant access is proposed, subject to site confirmation.

Adjacent LV room keeps transformer-to-incomer interfaces short.

Perimeter plantrooms separate supply equipment from the upper lift/stair/AHU core and remaining accommodation.

LV room has its own proposed west entrance.

LOAD ASSESSMENT

Offices: 1644.800 kVA.

AC: 1000 kW cooling -> 526.039 kW electrical -> 584.488 kVA at assumed PF 0.90.

Public services: 200 kVA aggregate allowance.

Two-zone conservative envelope: 2672.216 kVA.

Propose 2 x 1500 kVA, with equal zone allocation; no full-load N-1.

SITE CONDITIONS TO VERIFY

External apron, road and <=20m unloading route are not given by the source plan. Maintain >=3m clear delivery route.

Architectural wall openings, structural/flood/fire provisions, ventilation and supplier equipment approval require coordination.

GROUP 1 | TASK 1

Design basis: CLP COP215 Rev07; CLP COP101 v16.