
TASK 1 | GROUND-FLOOR PLANTROOM LOCATION

A3 LANDSCAPE | SCALE 1:200 | DIMENSIONS IN mm | GROUND FLOOR

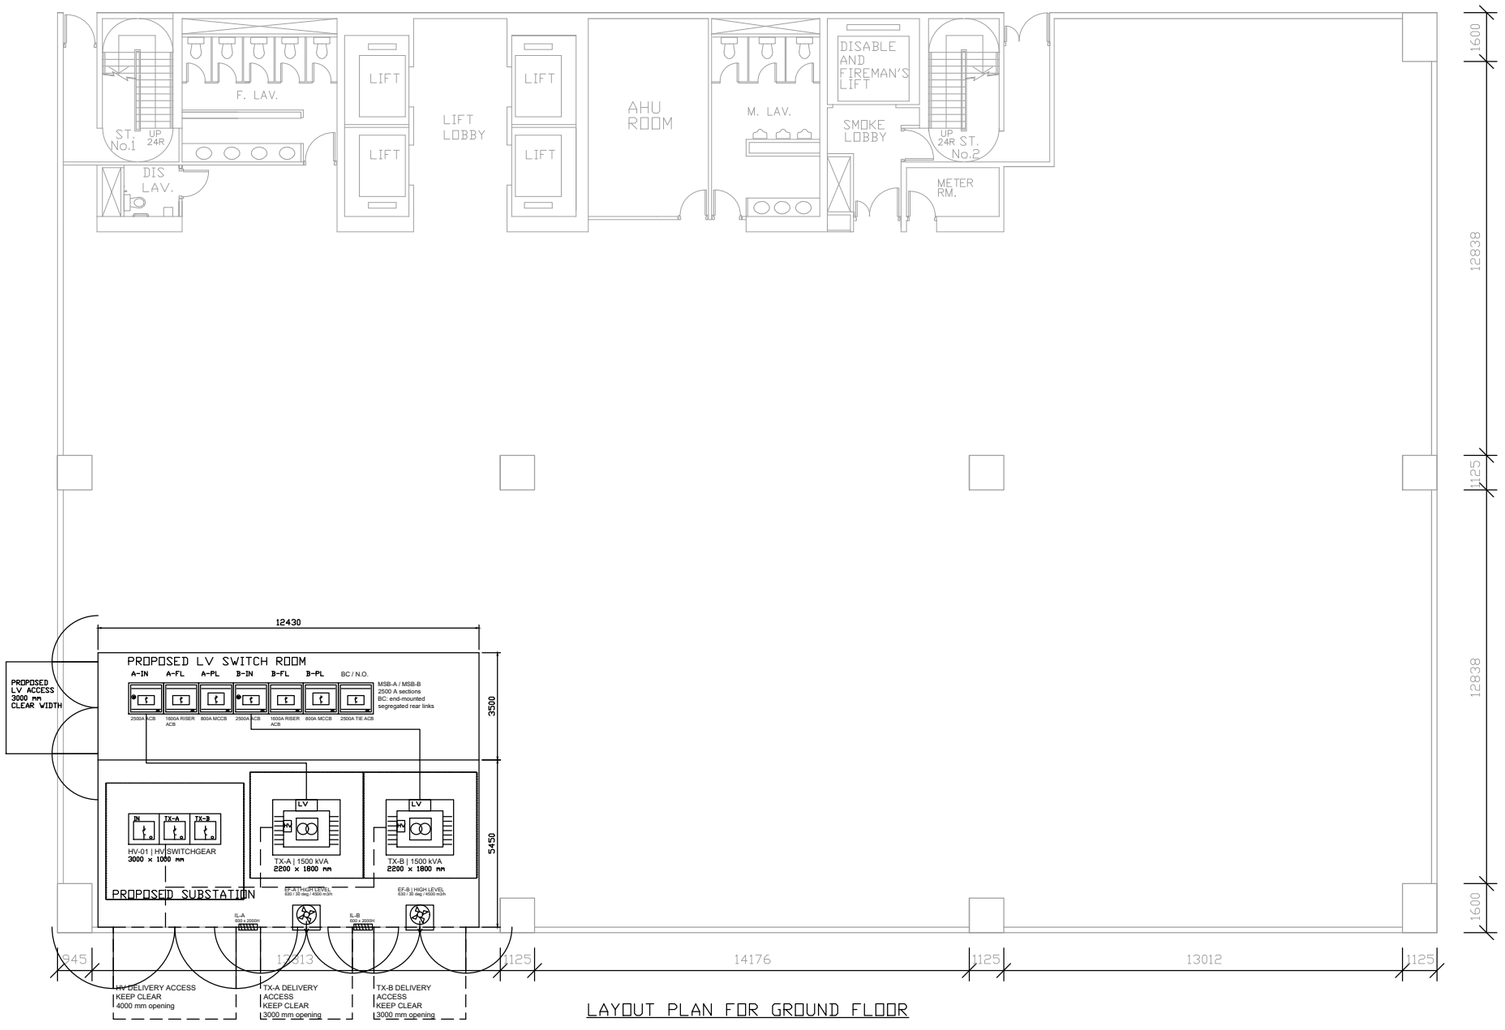

LAYOUT PLAN FOR GROUND FLOOR

PROPOSED LOCATION
Substation: 12430 x 5450 mm.
Adjacent LV room: 12430 x 3500 mm (proposed).
See 1:75 plantroom detail.

LOCATION REASONS
External plant access.
Short transformer-to-incomer interfaces.
Separation from lift/stair/AHU core.
Independent west entrance to LV room.

LOAD ASSESSMENT
Offices: 1644.800 kVA.
AC: 1000 kW cooling -> 526.039 kW electrical -> 584.488 kVA at assumed PF 0.90.
Public services: 200 kVA aggregate allowance.
Two-zone conservative envelope: 2672.216 kVA.
Propose 2 x 1500 kVA, with equal zone allocation; no full-load N-1.

SITE COORDINATION
Confirm external access, >=3 m clear delivery route and unloading within 20 m.
Coordinate openings, structure, flood/fire provisions and supplier equipment dimensions.

GROUP 1 | TASK 1

Design basis: CLP COP215 Rev07; CLP COP101 v16.