
TASK 2 | OFFICE 1 NORMAL LIGHTING

A3 PORTRAIT | SCALE 1:75 | DIMENSIONS IN mm | DB-O1

Full MS-O1-to-DB route: see incoming-route and ring-detail sheet.

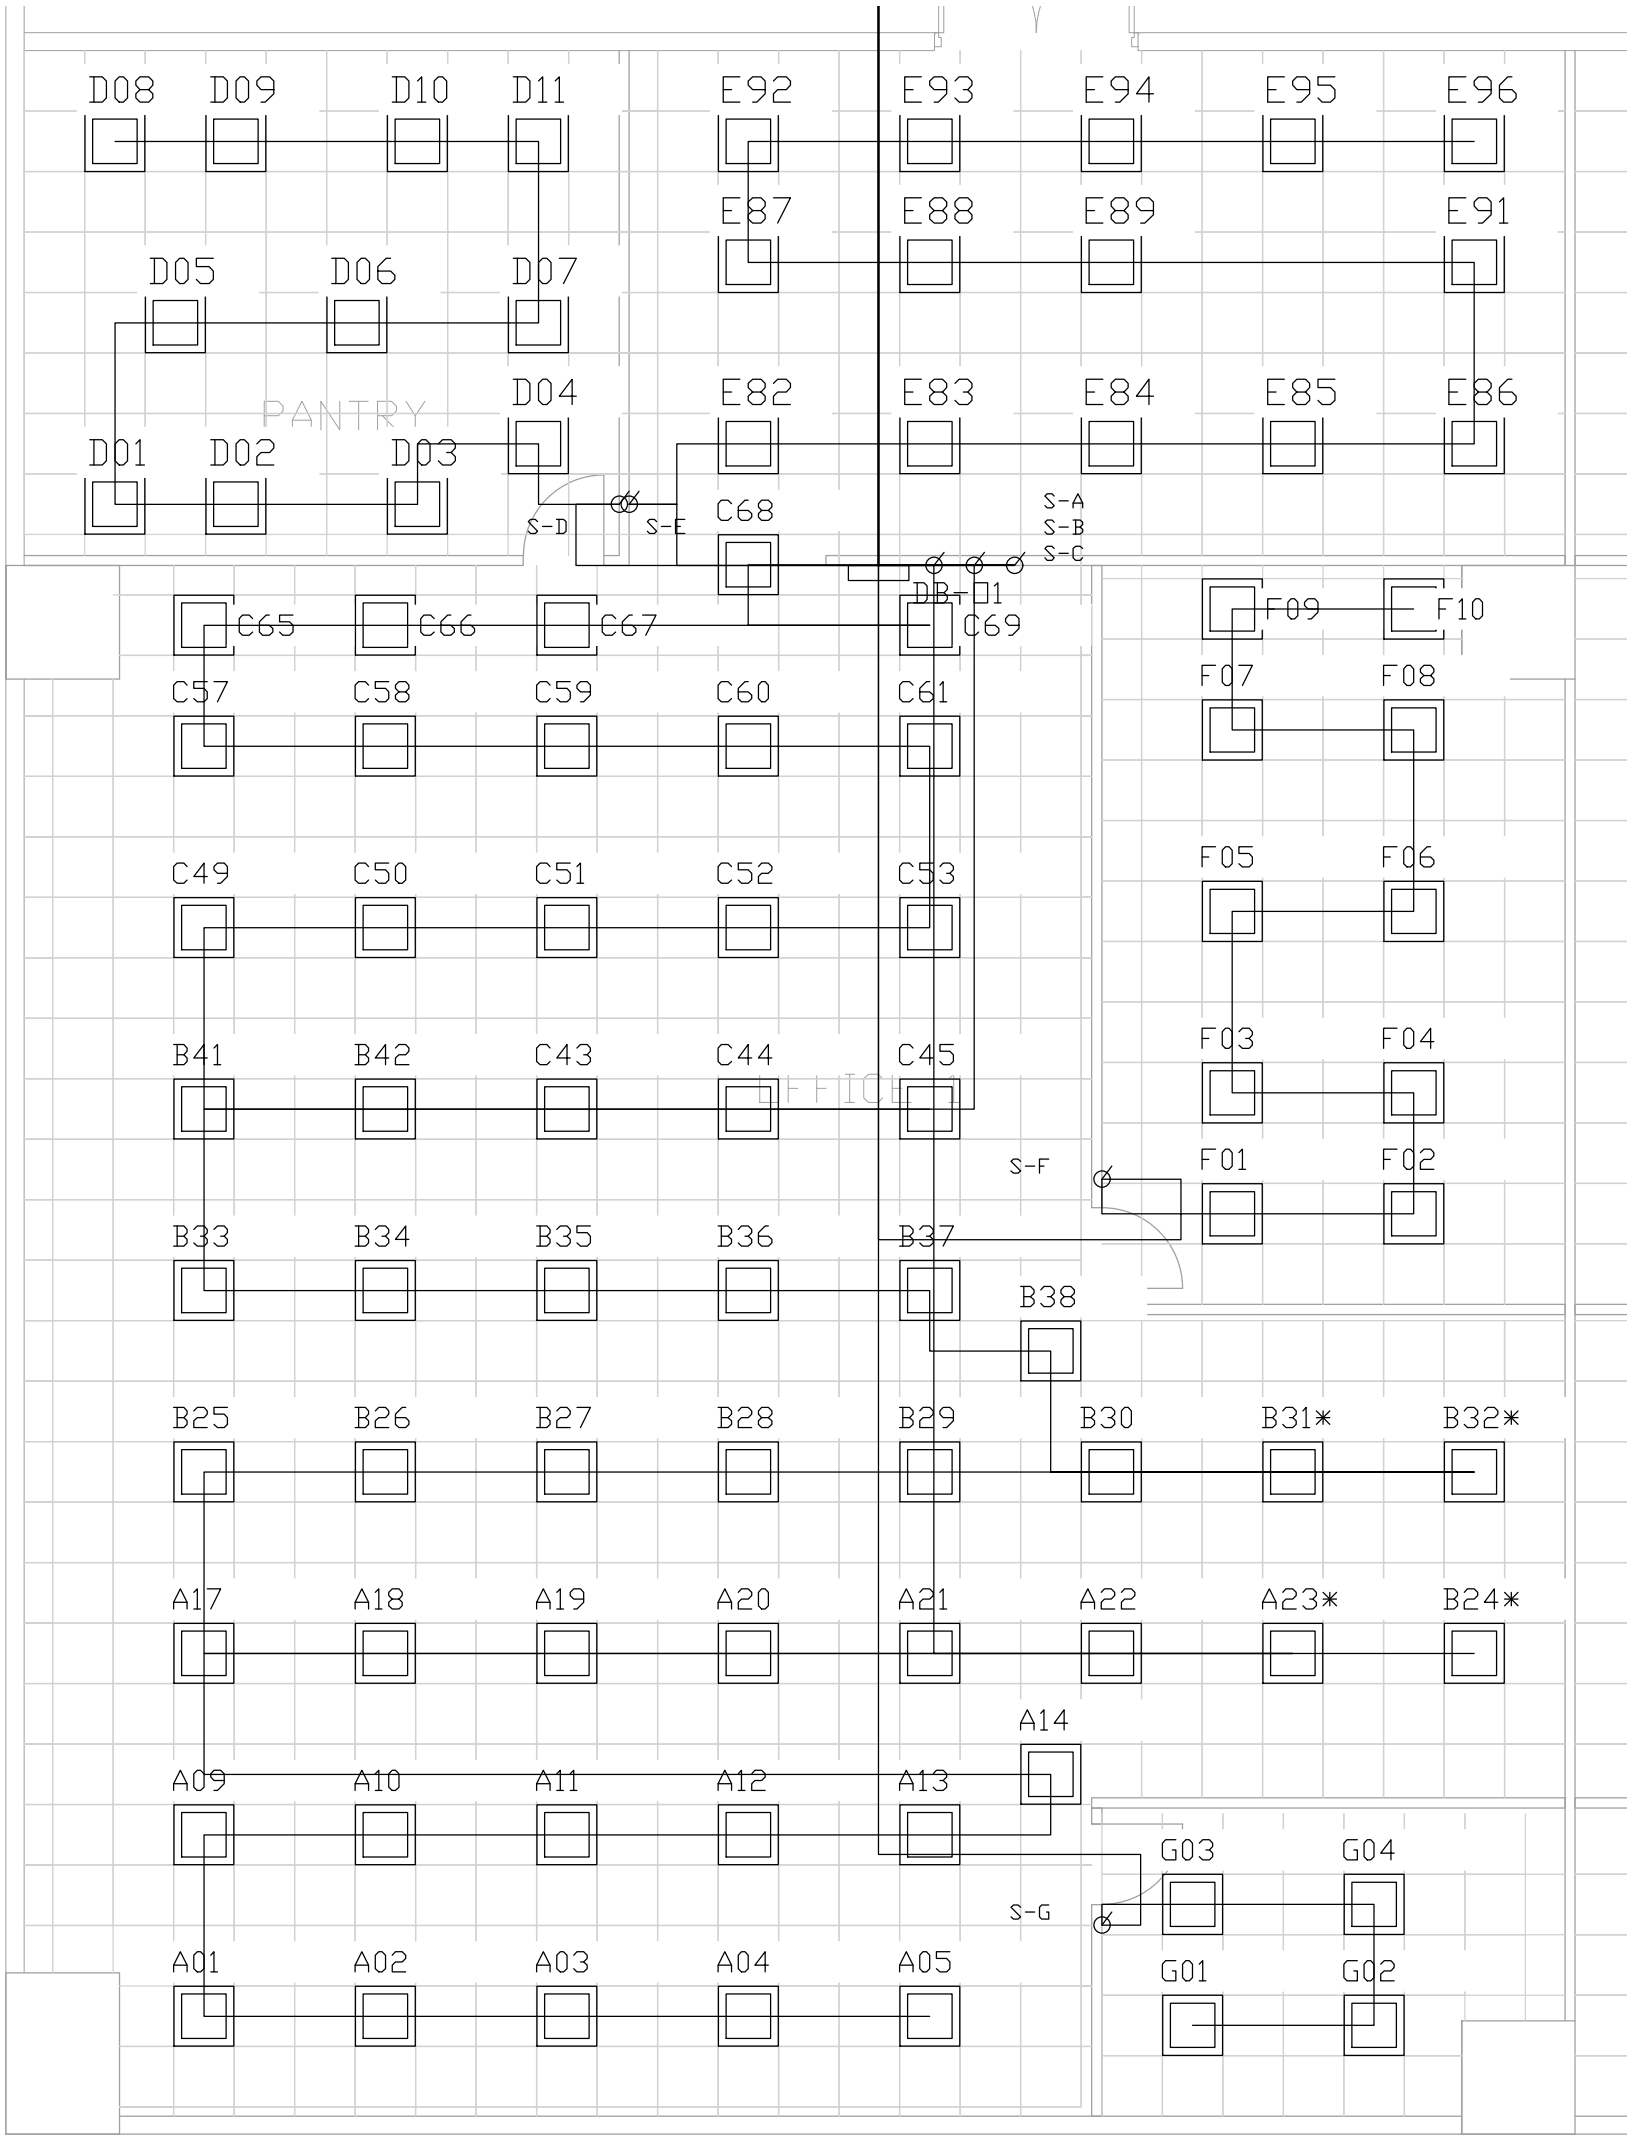

600x600 LED panel: A/B/C=22 W, *=28 W; D=22 W; E/F=28 W; G=38 W.

Label prefix gives LC-A ... LC-G; suffix retains device ID. S-A ... S-G = local switches.

LC-A L1 18 lamps /402 W B10 2.5 mm2 58.301m
LC-B L2 17 lamps /392 W B10 2.5 mm2 62.184m
LC-C L3 18 lamps /396 W B10 2.5 mm2 44.999m
LC-D L3 11 lamps /242 W B10 2.5 mm2 27.233m
LC-E L2 14 lamps /392 W B10 2.5 mm2 34.464m
LC-F L1 10 lamps /280 W B10 2.5 mm2 32.710m
LC-G L3 4 lamps /152 W B10 2.5 mm2 27.379m

92 panels /2256 W. All circuits: Type A 30 mA1P+N RCBO; L/N/CPC all2.5 mm2.

Manual controls20 AX, LED rating>=600 W; separate phase enclosures. Inrush compatibility required.

Normal lighting only. Landlord emergency/exit system independently supplied (design assumption).

Proposed routes follow plan; vertical/tail allowances and conditions are in Task3. Architecture retained as reference.

BSE3124 | 2026-11-07 | Read with15-way DB schematic and common circuit schedule