
TASK 2 | OFFICE 1 NORMAL LIGHTING

A3 PORTRAIT | 1:75 at actual size | mm | DB-O1 | COURSE DESIGN

Supply continues to MS-O1 at meter location; incoming route on model / DB schematic.

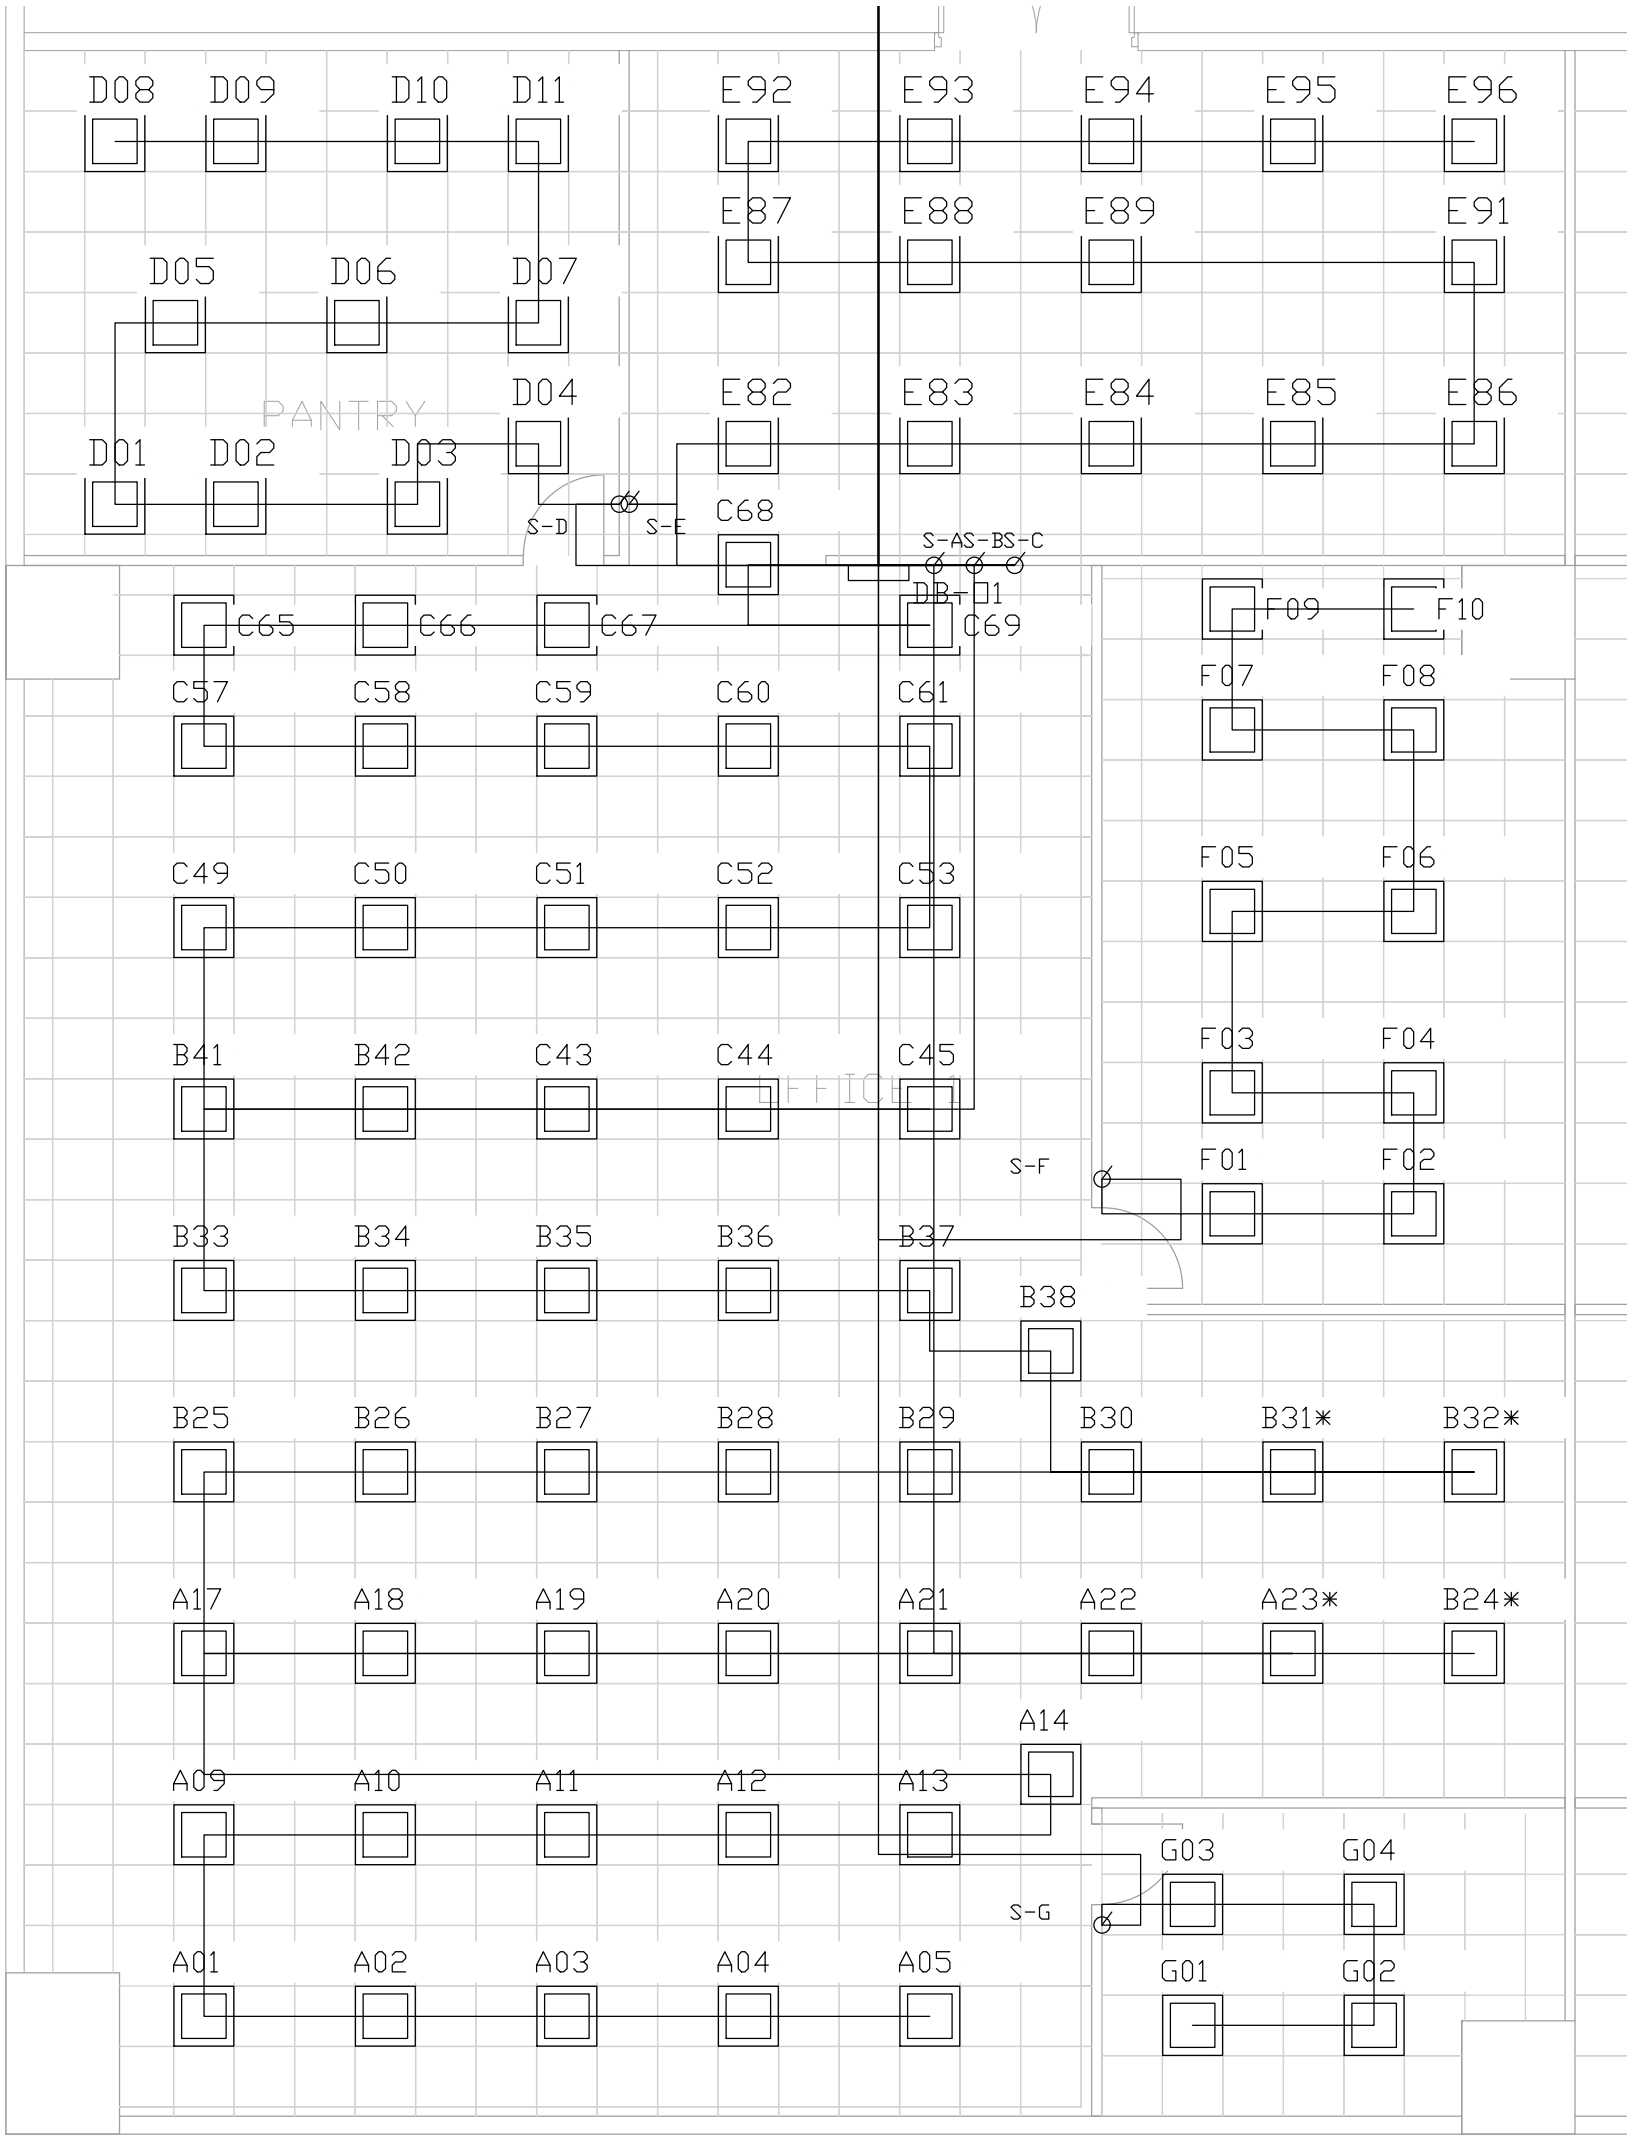

600x600 LED panel: A/B/C=22W, *=28W; D=22W; E/F/G=28W.

Label prefix gives LC-A ... LC-G; suffix retains device ID. S-A ... S-G = local switches.

LC-A L1 18 lamps /402W B10 2.5mm2 58.301m
LC-B L2 17 lamps /392W B10 2.5mm2 62.184m
LC-C L3 18 lamps /396W B10 2.5mm2 44.999m
LC-D L3 11 lamps /242W B10 2.5mm2 27.233m
LC-E L2 14 lamps /392W B10 2.5mm2 34.464m
LC-F L1 10 lamps /280W B10 2.5mm2 32.710m
LC-G L3 4 lamps /112W B10 2.5mm2 27.379m

92 panels /2216W. All circuits: Type A30mA1P+N RCBO; L/N/CPC all2.5mm2.

Manual controls20AX, LED rating>=600W; separate phase enclosures. Inrush compatibility required.

Normal lighting only. Landlord emergency/exit system independently supplied (course assumption).

Proposed routes follow plan; vertical/tail allowances and conditions are in Task3. Architecture retained as reference.

BSE3124 | 2026-11-07 | Read with15-way DB schematic and common circuit schedule